

MODEL TL-4902

International size reference: 1/2AA, ER14252



大豪电子
 电话: 0755-83233025
<http://www.szdahao.com>
<http://www.very-tec.com>

TADIRAN LITHIUM BATTERIES

TECHNICAL DATA



(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 0.5 mA, to 2 V 1.2 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 20 mA
- Maximum 1 sec. pulse capability 50 mA
- Weight 9.6 g (0.338 oz)
- Volume 4 cc
- Operating temperature range -55 °C to +85 °C
- U.L. Component Recognition, MH 12193

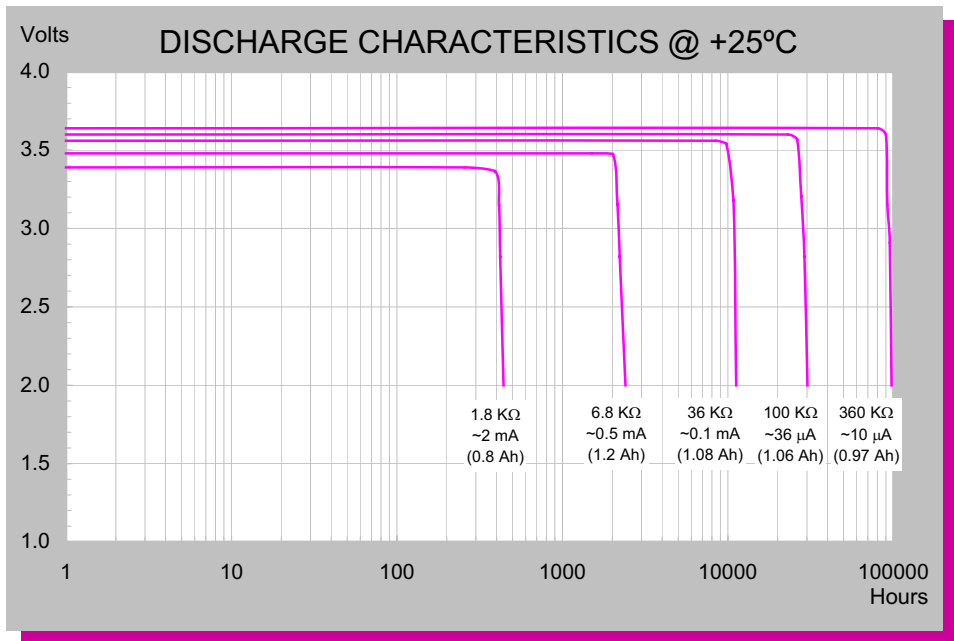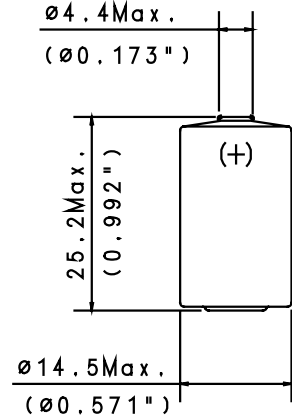

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4902-21000
SUFFIX- /T SOLDER TABS	15-4902-31000
SUFFIX- /P AXIAL PINS	15-4902-41000
SUFFIX- /PT2 RADIAL PINS	15-4902-36000
SUFFIX- /TP POLARIZED TABS	15-4902-52000
SUFFIX- /PT POLARIZED TABS	15-4902-53000

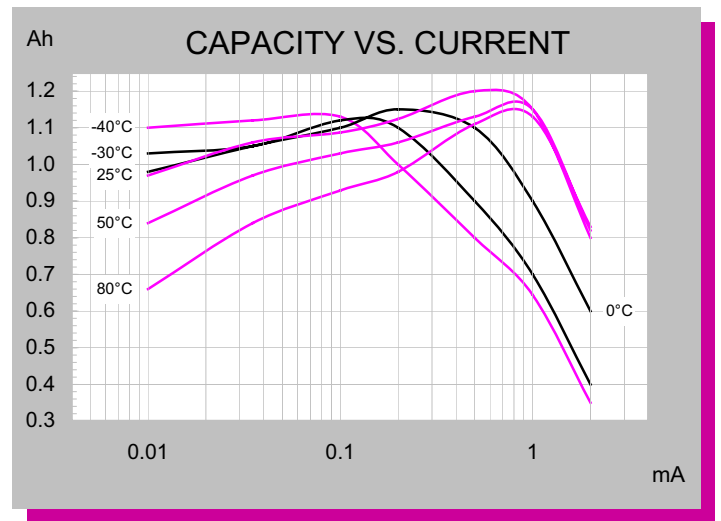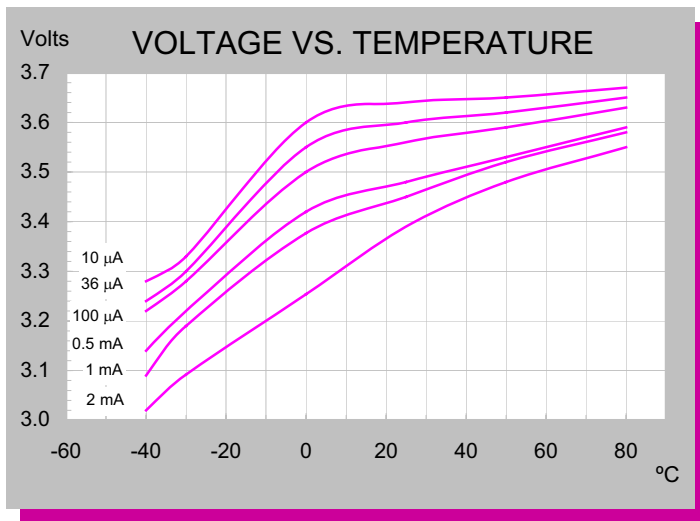

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06